

A Generator of Protein Folding Kinetics States for the Diffusion-Collision Model

Zlatko K. Vasilkoski and David L. Weaver

March 18, 2000

*Molecular Modeling Laboratory,
Department of Physics,
Tufts University,
Medford Massachusetts 02155
Correspondence: dweaver@tufts.edu*

Keywords: diffusion-collision model; protein folding models; microdomains; cellular automata; adjacency matrix.

Abstract

Two separate algorithms for calculating the intermediate states, using cellular automata and the initial conditions in the rate matrix for the diffusion-collision model are introduced. They enable easy and fast calculations of the folding probabilities of the intermediate states, even for a very large number of microdomains.

Introduction

In recent years, many theoretical and experimental studies have focused on the problem of describing the mechanism of protein folding. The goal is to develop a model that predicts protein folding rates and their dependence on factors such as temperature, amino acid sequences and so on. There are two aspects to the prediction problem: one is predicting the native structure of a protein from its sequence, which is thermodynamic in character; the other concerns the mechanism by which denatured proteins fold to

their native conformation, and is dynamic in character. The dynamical aspects of folding are often formulated taking into account Levinthal's paradox [1] that a random search of all possible structures will result in a time longer than the age of the universe.

A model that gives satisfactory predictions regarding the dynamical aspects of the protein folding is the diffusion-collision model of Karplus and Weaver [2], [4] (see Burton, Myers and Oas [4] for a recent experimental test of the model). This model considers the protein to be made of secondary structure elements - microdomains, each short enough, for a rapid conformational search so that Levinthal's paradox is avoided. Microdomain - microdomain folding is considered to occur as diffusion through solution, with some collisions between microdomains leading to smaller and then larger structures, until the native conformation is reached. The randomness of the diffusion process indicates a very important characteristic of the model: that the folding process may involve many possible paths, not just one pathway, leading to the folded state. Furthermore, the model can calculate the probabilities of kinetic intermediate states at any moment in time.

DESCRIPTION OF THE DIFFUSION-COLLISION MODEL

- The diffusion-collision model has the following properties:
- Presence of microdomains;
- Transient secondary structure is formed before tertiary structure;

- Transient accumulation of kinetic intermediates;
- Existence of folding pathways;
- Possible existence of non-native intermediates from non-native collisions;
- Solvent viscosity dependence of folding rates;
- Folding rates and favored pathways dependent on properties of microdomains;
- The microdomains move diffusively under the influence of internal and random external forces, and microdomain-microdomain collisions occur. The dynamics of folding is simulated by a set of diffusion equations that describe the motion of the microdomains in aqueous solution, and by boundary conditions that provide for the microdomains collision and possible coalescence. The diffusion-collision dynamics is represented as a network of steps, each containing a microdomain pair interaction, in which the rate of coalescence depends on the physical properties of the microdomains. The rates can be analytically expressed in terms of the physical parameters of the system.

Let us consider the following analytical model to calculate the folding rate of two connected microdomains, which is the elementary step in the diffusion-collision model. Consider two connected microdomains A and B that coalesce into AB.



The dynamical behavior of the microdomains is modeled by a diffusion equation. Since we have a system of two microdomains, the equations are coupled [3]. The relative motion diffusion equation is [3]:

$$\frac{\partial}{\partial t} \begin{pmatrix} \rho_1 \\ \rho_2 \end{pmatrix} = D \nabla^2 \begin{pmatrix} \rho_1 \\ \rho_2 \end{pmatrix} + \begin{pmatrix} -\lambda_1 & \lambda_2 \\ \lambda_1 & -\lambda_2 \end{pmatrix} \begin{pmatrix} \rho_1 \\ \rho_2 \end{pmatrix} \quad (2)$$

where ρ is a 2 element vector, ρ_1 being a probability density for both microdomains folded, and ρ_2 the probability density for all other possibilities. D is the relative diffusion constant, and the rate constants are λ_1 - from both folded state to all others,

and λ_2 the rate for the reverse process. Equation 2 couples microdomain-microdomain relative diffusion with the two-state folding-unfolding process carried out in solution by the microdomains. The connecting chain between them limits the diffusion space for microdomain - microdomain relative motion. An idealization is made that microdomains are spheres connected by a polypeptide chain considered to be a flexible featureless string. The collision and coalescence of the microdomains are governed by the boundary conditions for Equation 2. The inner boundary is the closest approach spherical shell, in terms of van der Waals envelopes of the microdomains. The closest approach distance of two microdomains is the sum of their radii R_{min} . The other constraint on the diffusion space is the maximal radial separation R_{max} between the microdomains, determined by the length of the string between A and B. So we have:

$$R_{min} = R_A + R_B \quad (3)$$

$$R_{max} = R_A + R_B + \text{shortest intervening chain length}$$

The boundary conditions on the probability density are specified as:

$$\frac{\partial \rho_{1,2}}{\partial r} \Big|_{R_{max}} = 0 \quad (4)$$

which means that the microdomains cannot get further away from one another than R_{max} and the condition:

$$\frac{\partial \rho_2}{\partial r} \Big|_{R_{min}} = 0 \quad (5)$$

meaning that the unfolded microdomains can not get closer to one another than R_{min} . Finally:

$$\rho_1 \Big|_{R_{min}} = 0 \quad (6)$$

indicating that the both states folded probability density ρ_1 is zero at the inner boundary, meaning that coalescence takes place.

The forward (folding) rate of coalescence of two microdomains to form a bond is taken to be $k_f =$

$1/\tau_f$ during intermolecular diffusion, where τ_f is the folding time, and has the following general form [3]:

$$\tau_f = \frac{l^2}{D} + \frac{L\nabla V(1-\beta)}{\beta DA} \quad (7)$$

Following Ref. 3, D is the relative diffusion coefficient, ∇V is the volume available for diffusion of each microdomain pair, A is their relative target surface area for collision, β the probability that the two microdomains are in a folded state, when they collide, so there is no barrier to coalescence. L and l are geometrical parameters that satisfy the boundary conditions for the diffusion equation in three dimensions. L has units of length and the value:

$$\frac{1}{L} = \frac{1}{R_{\min}} + \alpha \frac{\alpha R_{\max} \tanh[\alpha(R_{\max} - R_{\min})] - 1}{\alpha R_{\max} \tanh[\alpha(R_{\max} - R_{\min})]} \quad (8)$$

where $\alpha \equiv ((\lambda_1 + \lambda_2)/D)^{1/2}$

For the backward, unfolding rate $k_b = 1/\tau_b$, the unfolding time τ_b , has the following form [3]:

$$\tau_b = \mathcal{V}^{-1} e^{f_{AB}/k_b T} \quad (9)$$

The actual contact surface area A_{AB} between microdomains A and B , is used as well as f , the free energy change per unit area between the microdomains involved in the bond. The dissociation rate in the absence of an energy barrier is given by $\mathcal{V}$, k_b is the Boltzmann constant, and T is the absolute temperature.

Defining the folding and the unfolding rates in this way, for each two-microdomain process, multi-microdomain protein folding can be treated as a set of two-microdomain interactions, between all the possible pair combinations of interactions. The process is continuous in time and the second order diffusion partial differential equation, reduces [3] to a system of linear first order (in time) equations represented by the following vector equation with elements:

$$\frac{dp_i}{dt} = \sum_{j=1}^m K_{ij} p_j \quad (10)$$

Here p_j is the probability of a kinetic intermediate state, and would correspond to the concentration of a substance if the diffusion equation described

the time varying difference in concentration between several adjacent, spatially discrete regions. The elements R_{ij} of the rate matrix R are determined from the folding and unfolding rates, k_f and k_b . If R can be diagonalized


$$R = SAS^{-1} \quad (11)$$

then the vector equation can be solved, and by standard linear algebra procedures finding first the eigenvectors and eigenvalue matrix Λ of the rate matrix R , the probabilities p_i can be obtained as exponential functions of time:

$$p(t) = p(0) S e^{\Lambda t} S^{-1} \quad (12)$$

EXAMPLE OF DIFFUSION-COLLISION MODEL CALCULATIONS

Let us consider a simple protein chain, made of three microdomains as shown in Figure 1, with the microdomain properties given in Table I.



A representation of a 3-microdomain unfolded protein chain. The possible pairings for this simple protein chain are AB, AC and BC.

The actual pairings that are possible for this three microdomain protein are: AB, AC and BC. According to the diffusion-collision model, we have the schematic description of the possible states shown in Table II.

Here we have 8 possible states, the initial unfolded state #1, all 6 possible kinetic intermediate states, and the final folded state #8. The states are associated with the coalescence of the corresponding pairings that are indicated in Table II by the digit 1. A schematic view is shown in Figure 2. Based on the initial data, Table III of transitions, states, bonds and parameters can be obtained. For larger n-pairings between the microdomains, obtaining the data in Table

III is the most difficult part of the diffusion-collision calculation. The data from Table III goes into the calculations of folding and unfolding rates, k_f and k_b . Finally, the rate equation (Eq. 10) is solved to get p_i , the probabilities of the states as a function of time.

Several things can be generalized and noted for n pairings between the microdomains in a folding protein. First, it can be noted that the number of states is 2^n , since we consider two microdomain interaction at a time, the number of ways in which a population of n elements can be divided into two sub populations is 2^n . So we have:

- 2^n number of states (8 for $n = 3$)
- $n!$ number of independent pathways (6 for $n = 3$)
- $n2^{n-1}$ number of transitions (12 for $n = 3$)

For a larger number of microdomains and pairings between the microdomains, calculating the possible states, independent pathways, and all of the transitions can be a very tedious task. As can be seen from Table IV, the number of states, independent pathways, and the number of transitions, increases quickly with increasing n , the number of pairings between the microdomains of a protein. As n increases, the steepest increase is in the number of independent pathways, which grows as a factorial. It is interesting to note that this rapid increase in the number of possible native pathways may lend evolutionary stability to protein native structures, since they can be reached via multiple pathways, and blocking of one or more routes will probably not affect the folded state. From the point of view of actual calculations, these large numbers create a limiting problem, finding the actual states and pathways, and more specifically calculating R_{max} , which is a practical problem in a situation when there are a large number of pathways, corresponding to different configurations of microdomain interactions.

The two algorithms described below are used to speed up and simplify the diffusion-collision calculations for a large number of microdomains.

ALGORITHM FOR OBTAINING DIFFUSION-COLLISION MODEL STATES

As mentioned before, for a given number of pairings n , the number of states is 2^n . For actual cal-

culations we need to distinguish all of those states and indicate to which coalesced pairings they correspond. As can be seen from Table II, we identify these states with numbers, ranging from 1 to $2n$. The correspondence with the coalesced pairings is obtained by numbering the states with binary numbers, where the digit 1 at the appropriate position underneath the pairing, indicates that coalescence of that pairing occurs (see Table II). For example, state 1, the unfolded state, does not have a digit 1 in its binary representation. State 2 indicates that the pairing AB coalesced, so correspondingly there is a digit 1 underneath the pairing AB. The same numbering is applied to all the states. The binary notation keeps the information of which pairings coalesce, and they are related to the decimal numbering of the states by turning the binary number into decimal plus 1. This is a very useful and condensed way of numbering all the states, except that for large number of pairings n , it is not easy to write down and number all the states. The following algorithm does that.

It can be noted that 2^n states, grouped by the number of pairs in a state, are actually the binomial coefficients [5]:

$$(1+x)^n = 1 + \binom{n}{1}x + \binom{n}{2}x^2 + \dots + \binom{n}{n}x^n = 2^n \quad (13)$$

where $x = 1$, so for one pair states we have $\binom{n}{1}$ different states, for two pair states we have $\binom{n}{2}$ different states, and so on. A schematic way of representing the binomial coefficients is the familiar Pascals triangle where the binomial coefficients in the next row are simply related by addition, to the values in the previous row. This motivates using cellular automata to create and represent the pair states (binomial coefficients).

Cellular Automata

Cellular automata are discrete space-time dynamical systems, where each cell has a set of possible values, belonging to a finite field. They reproduce on a space-time grid, evolving synchronously according to a specific mathematical rule usually in correlation with the number of cell neighbors on the grid, the most famous example being the Game of Life[6].

The simplest example of a cellular automaton would be the one-dimensional case, where the grid is actually made of segments on an infinite line, and the dependent variable q_n^t takes values 0 and 1. Here t and n are considered as time and space variables, respectively. The initial data is a set of zeros and ones, and the time evolution is given by the rule function $f_r(q_n^t)$ that enables us to construct the next step. So for any generation we have:

$$q_n^{t+1} = f_r(q_n^t) \quad (14)$$

Here the subscript r indicates the neighborhood of the rule function, or on how many spatial neighbors ($2r + 1$ in this case) the cell at position k depends:

$$q_k^{t+1} = f_r(q_{k-r}^t, \dots, q_k^t, \dots) \quad (15)$$

For example, by taking the simple case of $r = 1$ (corresponding to nearest neighbor correlation) and a rule function defined as:

$$q_k^{t+1} = (q_{n-1}^t + q_{k+1}^t) \equiv q \pmod{2} \quad (16)$$

where q is either 1 or 0 and $\equiv$ stands for Congruence (integral divisibility in the sense $0 \equiv 0 \pmod{2}$; $1 \equiv 1 \pmod{2}$; $2 \equiv 0 \pmod{2}$), we get the pattern in Table V. As we can see, the rule of multiplication is that the cell multiplies in the next moment of time (generation) at position $n-1$ and $n+1$. In addition, there is the rule of annihilation (overcrowding) of cells that happens when a cell has two neighbors (ones). The middle cell becomes zero from overcrowding since two new cells are born on the same place. These rules apply to all generations (time steps). This is just one example of a rule function whose pattern is a picture of Serpinskys triangle, that is, a fractal formed by deleting the inside triangle of a larger equilateral triangle. Serpinskys triangle can be also generated from Pascals (binomial coefficients) triangle by deleting the even numbers from it. This is the motivation for using a kind of a cellular automaton with a similar rule function as a way of generating the pair states (binomial coefficients) for the diffusion-collision model. The missing feature in the rule for succeeding generations is the binomial representation of the states that actually keeps the information about the transitions, independent pathways

and the pairings involved. To solve this problem, an additional feature is added to the cellular automata, namely putting a binary genetic code in the cells of the one-dimensional cellular automata. By adding a rule to the evolution of the cellular automata, involving the transfer of the binary genetic code to the next cell, we will be able to keep track of kinetic intermediates and get all the information necessary for our purpose of describing the folding kinetics of the states for the diffusion-collision model.

Cellular Kinetics

Different folding states are obtained by evolving one-dimensional cellular automata with a binary genetic code contained in each of the cells. At every new generation the binary genetic code is mixed with the parents code from the previous generation. The rule of mixing is the following: in the next generation, a 0 from the right is attached to the binary genetic code of the cell on the $n - 1$ position, and a 1 from the right is attached to the binary genetic code of the cell on the $n + 1$ position. For example, starting from generation t :

```

Generation (t):
cell [ 011010 ]
Generation (t+1):
cell [ 011010 <-0 ] cell [ 011010 <-1 ]

```

The binary genetic code for the first few generations is:

```

Gen. (t=0)           [0]
Gen. (t=1)      [0<-0]  [0<-1]

```

After the first generation, to the initial binary genetic code [0] at $t = 0$ and n -th position, we have one zero added from the right at $t = 1$; $(n - 1)$ -th position obtaining [00] and one 1 added from the right at $t = 1$; $(n + 1)$ -th position obtaining [01].

```

Gen. (t=2)      [00<-0]  [00<-1]  [01<-1]
Gen. (t=2)                        [01<-0]

```

From the second generation each cell multiplies to the left and to the right adding a 0 or 1 respectively to the end of its own binary genetic code, forming the following cells:

Gen. (t=3)	[000<-0]	[000<-1]	[001<-1]	[011<-1]
Gen. (t=3)		[001<-0]	[010<-1]	
Gen. (t=3)		[010<-0]	[011<-0]	

We can see that by applying this rule we get exactly the states we need for our purpose of describing the diffusion-collision folding kinetics. Continuing this simple rule will list all the states in binary/decimal form for fast and easy generation of a large number of pairings. Enumerating all the possible states in this manner is very convenient for keeping track of the independent pathways and transitions for diffusion-collision folding kinetics.

ALGORITHM FOR OBTAINING R_{max}

A second important problem in calculations of diffusion-collision folding kinetics for a large number of pairings n , is finding the upper bound of the diffusion space $-R_{max}$. As mentioned before, R_{max} needs to be found for every transition and is then used to calculate the folding rate k_f for that transition. The problem becomes complicated even for a small number of pairings, like $n = 5$ or 6 . The different microdomain conformations make it very hard to find what is the maximal distance between the pairings that are supposed to coalesce. Below is a schematic illustration of the problem and the algorithm that is used to solve it.

In the diffusion-collision model, the microdomain structure of a protein is assumed to be like a number of beads on a string, all having different radii and distances between one another. In its unfolded state the protein will look, for example, like the string of 11 beads (microdomains) shown in Figure 3. To find the maximum distance between coalescing microdomains, for example beads 2 and 7, we need only to sum up the distances 2-3, 3-4, 4-5, 5-6, 6-7, the diameters of beads 3,4,5 and 6 and the radii of beads 2 and 7. This will be the maximum size of the (spherical) diffusion space. The minimum size is the radial distance between their centers, when bead 2 and 7 are in contact. The situation quickly becomes complicated when more beads (microdomains) start to coalesce. For example, if we have to find again the maximum distance between beads 2 and 7, but beads

3 and 9 have already coalesced, then we need to worry about additional paths between beads 2 and 7. We will then have several different ways of calculating the distances. For example, from 2 to 7 we can go through 2-3, 9-4-5-6-7, or 2-3, 9-8-7, as illustrated in Figure 4. In this case, we need to find the shortest of the possible paths between 2 and 7. Depending on the distances and radii of the beads, any of the available ways for a given conformation can be the shortest. As we have more and more beads (microdomains) coalescing, the situation soon gets very complicated. In order to analyze the different confirmations, we need first to have a way of keeping track of them. That can be done by using matrices. The N-microdomain protein structure is kept in the adjacency matrix (AM). It is a $N \times N$ matrix where the nonzero elements indicate the adjacent neighbors. For our example of $N = 11$ microdomains, the adjacency matrix (AM) for the unfolded state is given in Table VI. Coalescence between microdomains 3 and 9 changes the adjacency matrix (AM), so that 3 is now a neighbor to 10 and 8, and 9 is a neighbor to 2 and 4, which is indicated in the new adjacency matrix in Table VII, as new nonzero elements.

In order to find R_{max} between two beads i and j , once we have a way of tracking the different conformations, we need to consider all the possible ways of getting from i to j , for a given conformation of the other beads. Multiplying the adjacency matrix AM with itself does that. The power n of AM^n will correspond to the steps between the beads. The new nonzero elements in the product matrix contain all of the possible routes to get from the initial bead i to n . In order to get to j we need to repeat the procedure at most $AM^{(j-i)}$ times. This will cover all of the possible steps (distances) between the coalescing pair (i, j) . For our purpose of finding R_{max} , we just need to choose a specific pattern of nonzero elements. To get that pattern we need to form a matrix that contains the i -th column of the correct power of AM as shown in Table VIII. This is an example of the matrix that is used to determine the steps (distance) from the first microdomain $i = 1$. For example, for $j = 8$, we need just the first 7 rows of the above matrix. The valid steps are the nonzero elements of the matrix, and more specifically the various diago-

nal ones. The actual numbers in the above matrix dont mean anything. What matters is whether they are zero or not.

The program that calculates R_{max} , starts from the initial microdomain, and goes to the neighboring one in a certain direction (left and right diagonal, since we count the distance between neighbors). There are two different directions that the steps (distance) can be taken, indicated by the yellow color (from left to right), and green (from right to left). In the Matlab program for this algorithm, this information is kept in a cell array of the position in the matrix and the direction (left/right). An additional feature is that when the step comes to a microdomains index that is a part of a pairing (as microdomains 3-9 in the previous example) the step splits into left and right. This is indicated by the light blue colored elements in the matrix above. Associating the radii of the microdomains with the elements in the above matrix, and the transitions from row to row in a certain direction with the distance between the microdomains, gives an easy way to find the distance (R_{max}) between any of the microdomains.

SUMMARY

The diffusion-collision model was suggested in 1976 as a model for the process of protein folding based on the dynamical interactions of microdomains, as a series of diffusion-collision steps. Since then the calculational power of computers has greatly increased, which enables faster calculations in the model. However the combinatorial complexity for the calculation of states, independent pathways, transitions, and R_{max} is too lengthy, and susceptible to error, if carried out by hand for each protein to be studied. Introducing the two described algorithms reduces all of these calculations to several minutes, even for a large number of pairings. The algorithms have been implemented as MATLAB programs. For a particular protein, the number of microdomains, the number of pairings and actual pairs, microdomain radii and distances between microdomains are input parameters.

References

- [1] Levinthal C. (1968) J Chem Phys 65, 44-45.
- [2] Karplus, M., and Weaver, D.L. (1976) Nature (London) 260, 404-406.
- [3] Karplus, M., and Weaver, D.L. (1994) Protein Science 3, 650-668.
- [4] Burton, R. E., Myers, J.K., and Oas, T.G. (1998) Biochemistry 34, 5337-5343.
- [5] Feller W., An Introduction to Probability Theory and Its Applications (1957)
- [6] Berlekamp E.R., Conway J.H., Guy R.K. Winning Ways (1981)

Table I. Example of a three microdomain protein data.*

Microdomain	Radius ($\text{\AA}$)	Distance ($\text{\AA}$)	Access area ($\text{\AA}^2$)
A	r_A		A_A
B	r_B		A_B
C	r_C		A_C
AB		c_{AB}	A_{AB}
AC			A_{AC}
BC		c_{BC}	A_{BC}
ABC			A_{ABC}

*Numerical values of these properties are the input parameters in diffusion-collision model calculations.

Table II. Possible states for a three-microdomain protein.*

#	BC	Unfolded		AB	#	BC	One-Pair		AB	#	BC	Two-Pair		AB	#	BC	Folded		AB
		AC					AC					AC					AC		
1	0	0		0	2	0	0		1	4	0	1		1	8	1	1		1
					3	0	1		0	6	1	0		1					
					5	1	0		0	7	1	1		0					

*A schematic description of the possible kinetic intermediate states. Decimal numbers enumerate the states, while the binary digit 1 in the binary numbers represents a coalesced pair. The decimal number is obtained by adding one to the decimal value of the binary number.

Table III. Transition States, Bonds and Parameters of three-microdomain protein.*

Transition	Initial State	Bond Formed	Final State	R_{min}	R_{max}
1->2	A-B-C	AB	AB-C	$rA+rB$	$rA+cAB+rB$
1->3	A-B-C	AC	B-AC	$rA+rC$	$rA+cAB+2rB+cBC+rC$
1->5	A-B-C	BC	A-BC	$rB+rC$	$rB+cBC+rC$
2->4	AB-C	AC	ABC_1	$rAB+rC$	$rAB+cBC+rC$
2->6	AB-C	BC	ABC_2	$rAB+rC$	$rAB+cBC+rC$
3->4	B-AC	AB	ABC_1	$rB+rAC$	$rB+cBC+rAC$
3->7	B-AC	BC	ABC_3	$rB+rAC$	$rB+cBC+rAC$
5->6	A-BC	AB	ABC_2	$rA+rBC$	$rA+cAB+rBC$
5->7	A-BC	AC	ABC_3	$rA+rBC$	$rA+cAB+rBC$
4->8	ABC_1	BC	ABC_4	$rB+rC$	$\pi rABC$
6->8	ABC_2	AC	ABC_4	$rA+rC$	$\pi rABC$
7->8	ABC_3	AB	ABC_4	$rA+rB$	$\pi rABC$

*Based on the initial parameters, the data in this table is obtained from the diffusion-collision model calculations. The data is then used to calculate the probabilities of the kinetic states and the folding and unfolding rates by solving the diffusion equation.

Table IV. Combinatorial dependence on the number of pairings.*

# of pairings n	# of states 2^n	# of independent pathways n!	# of transitions $n2^{n-1}$
1	2	1	1
2	4	2	4
3	8	6	12
4	16	24	32
5	32	120	80
6	64	720	192
7	128	5040	448
8	256	40320	1024
9	512	362880	2304

*Considering large number of pairings n, between the microdomains of the protein, the number of states, transitions, and independent pathways increases quickly, thus creating combinatorial complexity in the calculations.

Table V. Simple cellular automaton pattern

0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
0	0	0	0	0	0	1	0	1	0	0	0	0	0	0
0	0	0	0	0	1	0	0	0	1	0	0	0	0	0
0	0	0	0	1	0	1	0	1	0	1	0	0	0	0
0	0	0	1	0	0	0	0	0	0	0	1	0	0	0
0	0	1	0	1	0	0	0	0	0	1	0	1	0	0
0	1	0	0	0	1	0	0	0	1	0	0	0	1	0
1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

Table VI. Adjacency matrix for N=11 with no pairings

AM(1,:)	0	1	0	0	0	0	0	0	0	0	0
AM(2,:)	1	0	1	0	0	0	0	0	0	0	0
AM(3,:)	0	1	0	1	0	0	0	0	0	0	0
AM(4,:)	0	0	1	0	1	0	0	0	0	0	0
AM(5,:)	0	0	0	1	0	1	0	0	0	0	0
AM(6,:)	0	0	0	0	1	0	1	0	0	0	0
AM(7,:)	0	0	0	0	0	1	0	1	0	0	0
AM(8,:)	0	0	0	0	0	0	1	0	1	0	0
AM(9,:)	0	0	0	0	0	0	0	1	0	1	0
AM(10,:)	0	0	0	0	0	0	0	0	1	0	1
AM(11,:)	0	0	0	0	0	0	0	0	0	1	0


Table VII. Adjacency matrix for N=11 with microdomains 3-9 pairing

AM(1,:)	0	1	0	0	0	0	0	0	0	0	0
AM(2,:)	1	0	1	0	0	0	0	0	1	0	0
AM(3,:)	0	1	0	1	0	0	0	1	0	1	0
AM(4,:)	0	0	1	0	1	0	0	0	1	0	0
AM(5,:)	0	0	0	1	0	1	0	0	0	0	0
AM(6,:)	0	0	0	0	1	0	1	0	0	0	0
AM(7,:)	0	0	0	0	0	1	0	1	0	0	0
AM(8,:)	0	0	1	0	0	0	1	0	1	0	0
AM(9,:)	0	1	0	1	0	0	0	1	0	1	0
AM(10,:)	0	0	1	0	0	0	0	0	1	0	1
AM(11,:)	0	0	0	0	0	0	0	0	0	1	0

Table VIII. Adjacency matrix pattern used to find $R_{\max}$.

Initial	1										
AM ¹ (1,:)	0	1	0	0	0	0	0	0	0	0	0
AM ² (2,:)	1	0	1	0	0	0	0	0	1	0	0
AM ³ (3,:)	0	3	0	2	0	0	0	2	0	2	0
AM ⁴ (4,:)	3	0	9	0	2	0	2	0	9	0	2
AM ⁵ (5,:)	0	21	0	20	0	4	0	20	0	20	0
AM ⁶ (6,:)	21	0	81	0	24	0	24	0	81	0	20
AM ⁷ (7,:)	0	183	0	186	0	48	0	186	0	182	0
AM ⁸ (8,:)	183	0	737	0	234	0	234	0	737	0	182
AM ⁹ (9,:)	0	1657	0	1708	0	468	0	1708	0	1656	0
AM ¹⁰ (10,:)	1657	0	6729	0	2176	0	2176	0	6729	0	1656
AM ¹¹ (11,:)	0	15115	0	15634	0	4352	0	15634	0	15114	0

Figure 2.

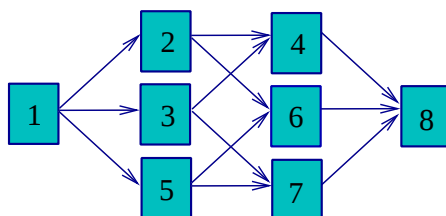


A schematic view of the states and transitions for 3 microdomains with $n=3$. There are 8 states, 6 ways to get from state 1 to state 8 and 12 transitions represented by arrows.

Figure 3.



A representation of an 11 - microdomain unfolded protein chain.

Figure 4.

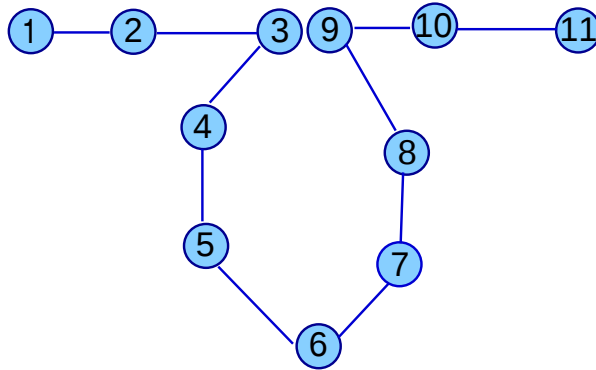

A representation of an 11 - microdomain protein chain with one coalesced pairing between microdomains 3 and 9.
The pairing has changed the adjacency matrix.